

MATCHLINE SEE SHEET C1.3

**GRADING AND DRAINAGE**

- 4 CONSTRUCT NEW SIDEWALK PER MAG STD. DET. 230.
- 8 EXISTING STORM DRAIN SYSTEM TO BE CLEANED OUT OF ALL DEBRIS.
- 9 INSTALL 12" BY 12" PVC AREA DRAIN WITH 6" CONNECTION TO EXISTING 12" STORM DRAIN LINE BELOW.
- 10 INSTALL NEW 12" H.D.P.E. STORM DRAIN SYSTEM.
- 11 INSTALL 12" BY 12" PVC AREA DRAIN WITH 6" CONNECTION TO NEW 12" STORM LINE BELOW.
- 12 CONNECT NEW 12" STORM DRAIN LINE TO EXISTING MANHOLE.
- 14 REMOVE EXISTING SIDEWALK


**FIRE LINE**

- 1 CONSTRUCT 12" BY 4" TAPPING SLEEVE, VALVE BOX AND COVER PER MAG STD. DET. 340. NEW FIRELINE TO BE DUCTILE IRON PIPE ENCASED IN POLYETHYLENE TUBE IN ACCORDANCE WITH AWWA C105 AND C600 WITHIN THE PUBLIC RIGHT OF WAY/EASEMENT. PAVEMENT REPLACEMENT AND TRENCH BACKFILL TO BE PER CITY OF GLENDALE STD. DET. G-319 AND G-690.
- 2 CONSTRUCT 8" BY 4" TAPPING SLEEVE, VALVE BOX AND COVER PER MAG STD. DET. 340. NEW FIRELINE TO BE DUCTILE IRON PIPE ENCASED IN POLYETHYLENE TUBE IN ACCORDANCE WITH AWWA C105 AND C600 WITHIN THE PUBLIC RIGHT OF WAY/EASEMENT. PAVEMENT REPLACEMENT AND TRENCH BACKFILL TO BE PER CITY OF GLENDALE STD. DET. G-319 AND G-390.

- 3 INSTALL C900 PVC CLASS 200 FIRE LINE, SIZE AS SHOWN.
- 4 INSTALL FIRE SPRINKLER RISER DETAIL WITH REMOTE FD CONNECTION PER CITY OF GLENDALE STD. DET. G-677.
- 5 INSTALL FIRE SPRINKLER RISER DETAIL WITH WALLMOUNT FD CONNECTION PER CITY OF GLENDALE STD. DET. G-378.
- 6 REMOVE FIRE DEPARTMENT CONNECTION WITH BUILDING NUMBER SIGNAGE.
- 7 SAWCUT REMOVE AND REPLACE EXISTING CONCRETE MATCHING EXISTING.
- 8 CONSTRUCT 8" BY 4" TAPPING SLEEVE, VALVE, BOX AND COVER PER MAG STD. DET. 340.

**SEWER**

- 1 NEW SEWER CONNECTION TO EXISTING BUILDING. SEE PLANS BY PLUMBING ENGINEER FOR LOCATION, DEPTH AND 2 WAY CLEANOUT.
- 2 SAWCUT EXISTING CONCRETE AND INSTALL NEW P.V.C. 4" SEWER CONNECTION AT MIN. SLOPE OF 1%.

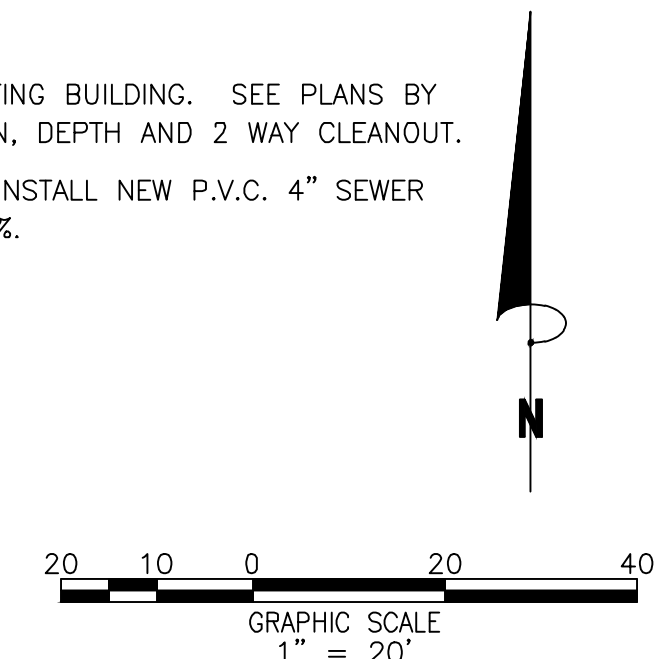

THE PROMPT PAY LAW WILL BE ALTERED FOR THIS CONTRACT  
 NOTICE OF EXTENDED PAYMENT PROVISION THE CONSTRUCTION CONTRACT WILL ALLOW THE OWNER TO MAKE PAYMENT WITHIN THIRTY (30) DAYS AFTER CERTIFICATION AND APPROVAL OF BILLINGS



DATE	DESCRIPTION
RBA	RLS
DESIGN	DRAWN
SCALE	H: 1"=20'
	V: N/A
JOB No.	050600-01-01
DATE :	JAN 31, 2019
<b>C1.2</b>	
SHEET	2 OF 3