



BY CONSTRUCTION

S80° 39' 45" W 2555.45'

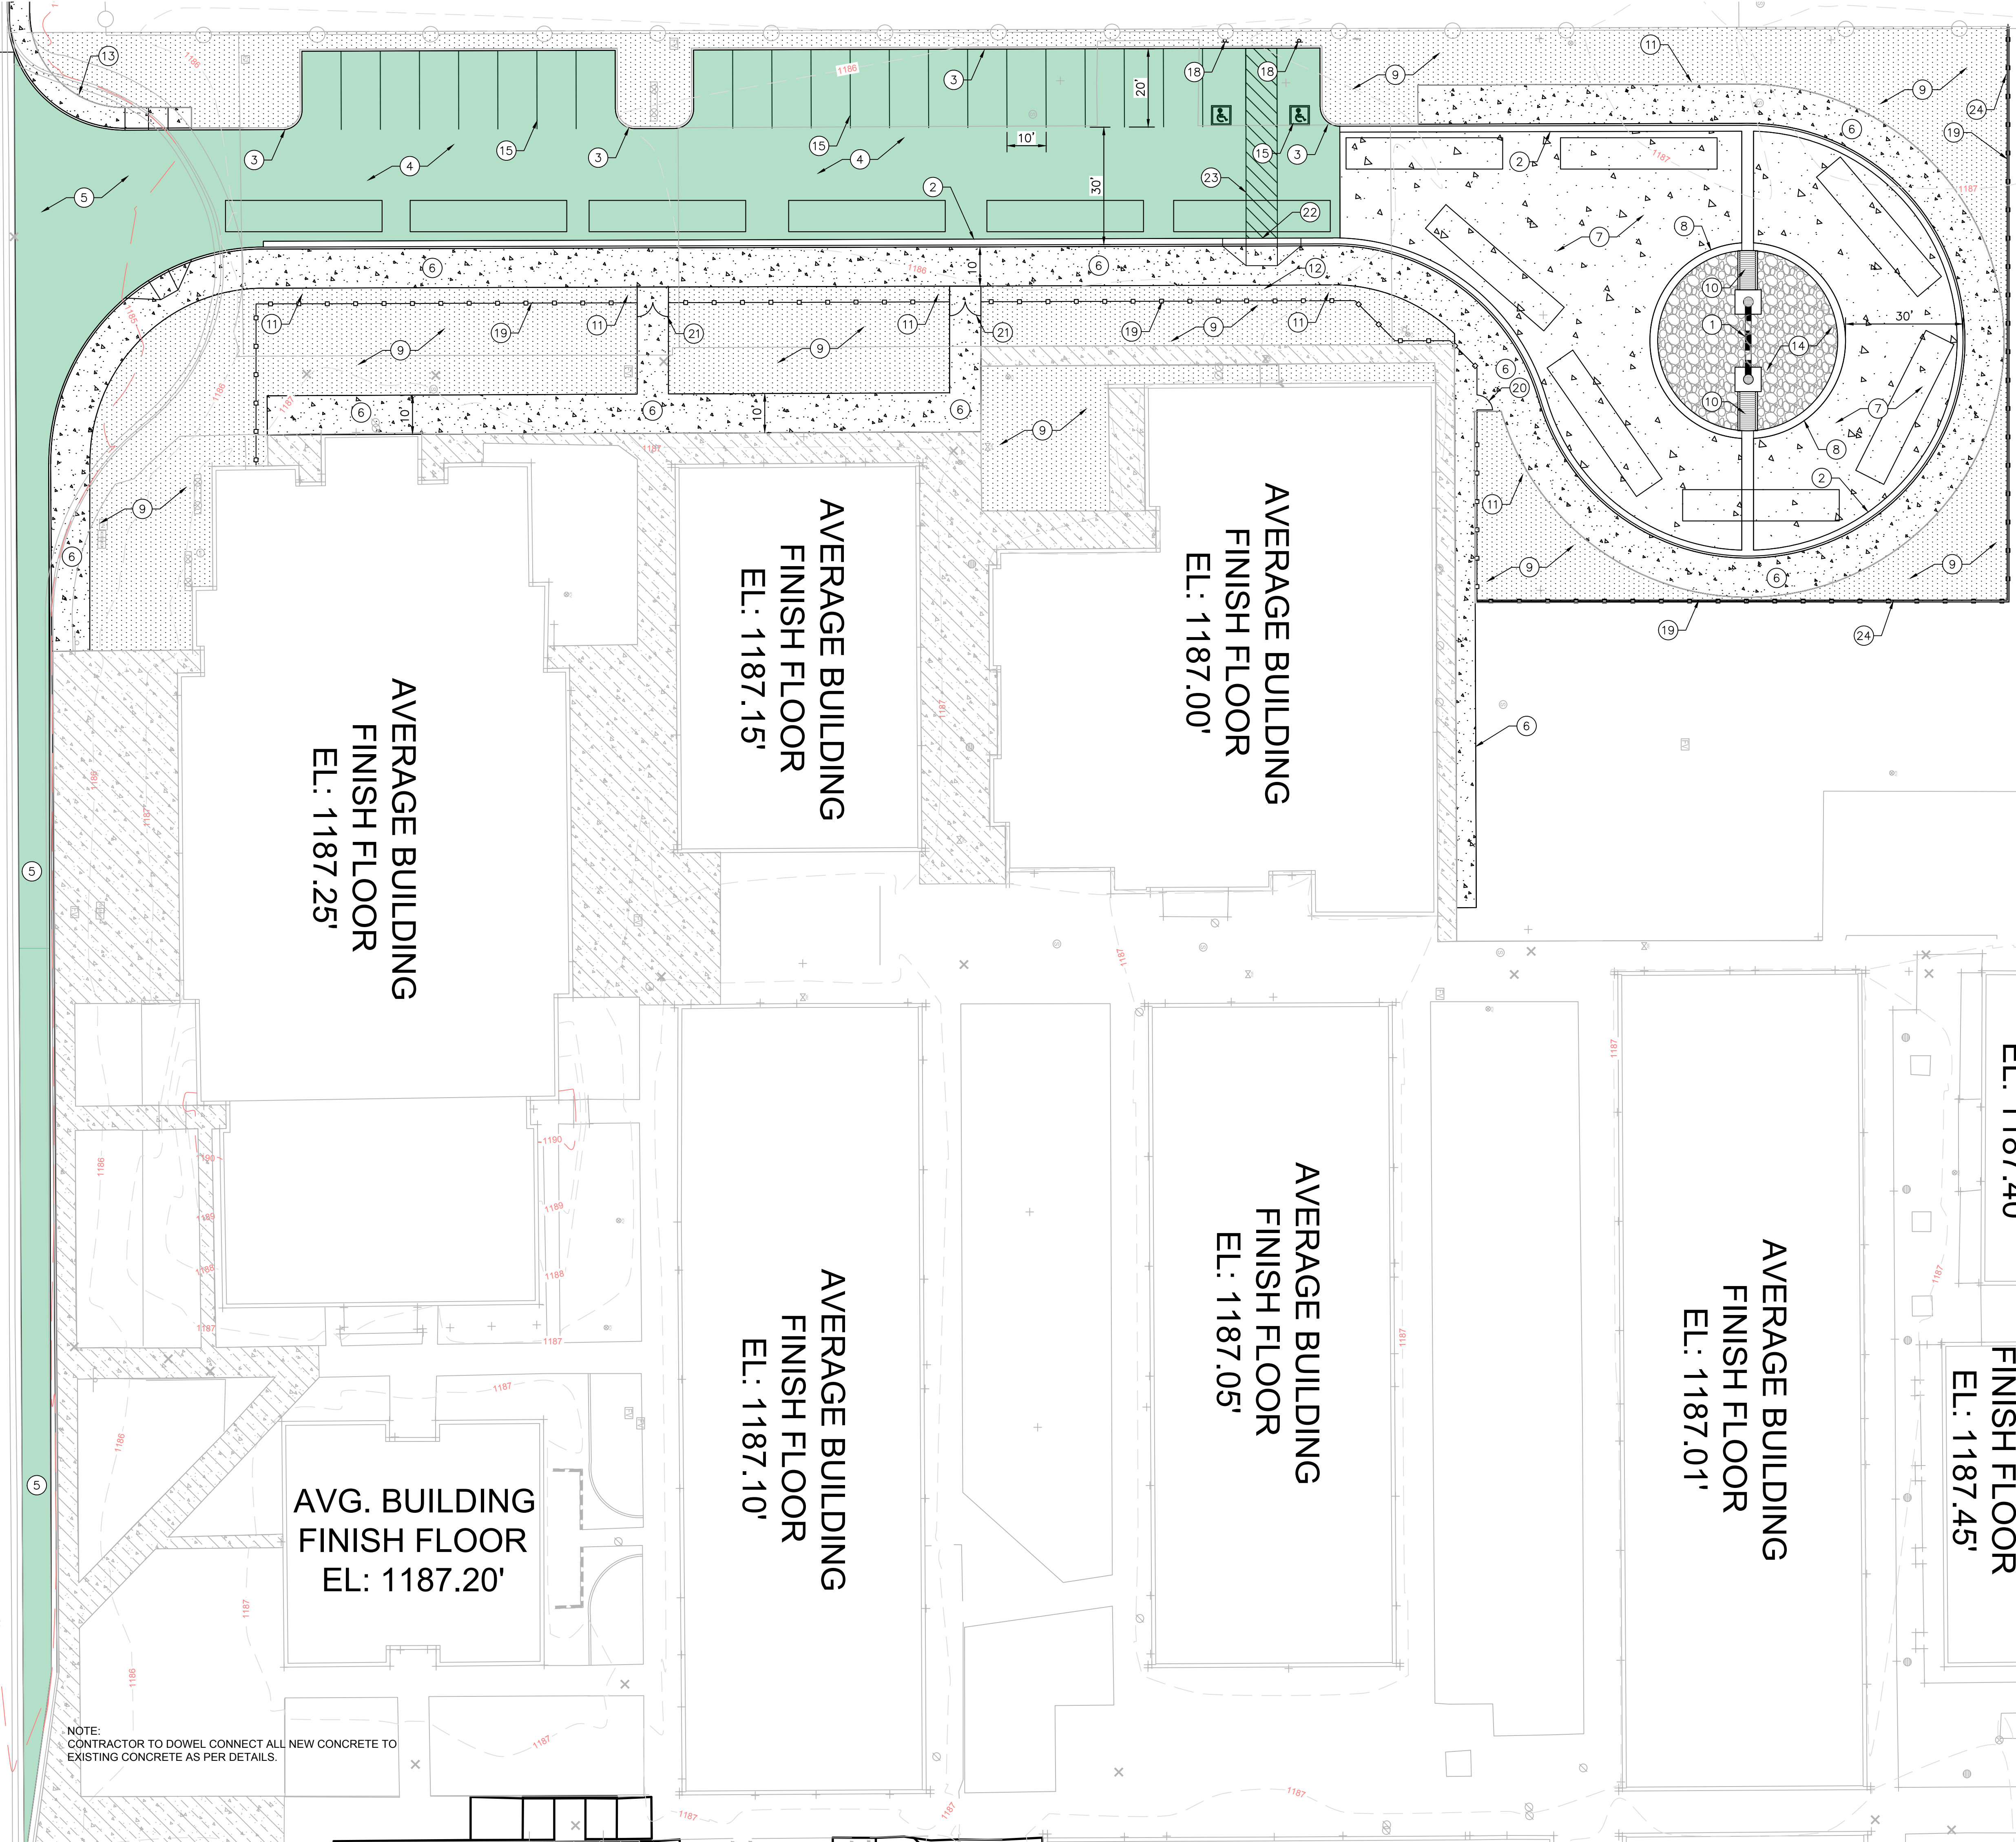

NOTE:
CONTRACTOR TO DOWEL CONNECT ALL NEW CONCRETE TO
EXISTING CONCRETE AS PER DETAILS.

- PROJECT KEY NOTES**
1. INSTALL MAXWELL IV DUAL CHAMBER DRY WELL.
 2. CONSTRUCT 6" VERTICAL CONCRETE CURB & GUTTER AS PER MAG STD. DTL. 220-1 'A'.
 3. CONSTRUCT 6" VERTICAL CONCRETE SINGLE CURB AS PER MAG STD. DTL. 222 'A'.
 4. NEW ASPHALT PAVEMENT 3" AC PAVEMENT OVER 8" ABC ON 8" PREPARED SUB-GRADE AS PER MAG SPECIFICATION SECTIONS 321 & 710.
 5. NEW ASPHALT PAVEMENT 5" AC PAVEMENT OVER 8" ABC ON 10" PREPARED SUB-GRADE AS PER MAG SPECIFICATION SECTIONS 321 & 710.
 6. CONSTRUCT CONCRETE SIDEWALK AS PER COP STD. DTL. P1230, 4" THICK, 3,000 PSI, DOWEL CONNECT TO EXISTING SIDEWALK ON ALL EXISTING EDGES.
 7. CONSTRUCT CONCRETE DRIVE WITH MAG CLASS 'AA', 4,000 PSI 8" CONCRETE PAVEMENT WITH STEEL REINFORCEMENT AND JOINTING PER DETAILS OVER 8" PREPARED SUB-GRADE AS PER MAG SPECIFICATIONS SECTION 301. CONCRETE PAVEMENT AS PER MAG SPECIFICATION SECTION 324. DOWEL CONNECT TO EXISTING BUILDINGS.
 8. CONSTRUCT VERTICAL CONCRETE ROLL CURB WITH GUTTER AS PER MAG STD. DTL. 220-1 'C'.
 9. INSTALL 3/4 MINUS DECOMPOSED GRANITE, MADISON GOLD.
 10. CONSTRUCT CONCRETE SCUPPER PAN AS PER MAG STD. DTL. 206, MODIFIED. DOWEL CONNECT TO CONCRETE CURB, TYP.
 11. CONTRACTOR TO INSTALL BUSES ONLY SIGN (34"x30") WITH NEW POLE & CONC. FOUNDATION AS PER MAG STD DTL 131, TYPE 'B'.
 12. CONTRACTOR TO INSTALL SCHOOL CROSSING PER MUTCD S1-1 WITH NEW SIGN POLE AND CONC. FOUNDATION AS PER MAG STD DTL 131, TYPE 'B'. FACE OF SIGN SHALL BE LOCATED 2 FT FROM THE BACK OF CURB OR EDGE OF SIDEWALK.
 13. CONTRACTOR TO INSTALL 'STOP' SIGN PER MUTCD R3-5-R WITH NEW POLE & CONC. FOUNDATION PER MAG STD DTL131, TYPE 'B'.
 14. INSTALL ANGULAR RIP RAP, D50=6, AT 18-INCH DEPTH WITH CONCRETE HEADER CURB AROUND PERIMETER OF RIP RAP.
 15. PAINT NEW PARKING STALL STRIPING 4-IN WIDTH (WHITE), 9 FT O.C. AS PER C.O.P. DETAIL, TYP.
 16. PAINT 24" STOP BAR MARKINGS. (WHITE)
 17. PAINT FIRE LANE CURB LINE. (RED)
 18. INSTALL ADA PARKING SIGNING AND STRIPING AS PER DETAILS, TYP.
 19. INSTALL 6 FT. HEIGHT, WROUGHT IRON FENCE, SUBMIT SHOP DRAWINGS FOR APPROVAL. MATCH EXISTING TYPE AND POWER COAT PAINT.
 20. INSTALL 6 FT. HEIGHT, 4 FT WIDE WROUGHT IRON GATE WITH LOCK EQUIPMENT, TYP. SUBMIT SHOP DRAWINGS FOR APPROVAL. MATCH EXISTING TYPE AND POWER COAT PAINT.
 21. INSTALL 6 FT. HEIGHT, 4 FT WIDE WROUGHT IRON DOUBLE GATES (8 FT TOTAL OPENING) WITH LOCK EQUIPMENT, TYP. SUBMIT SHOP DRAWINGS FOR APPROVAL. MATCH EXISTING TYPE AND POWER COAT PAINT.
 22. INSTALL CONCRETE RAMP AS PER MAG STD DTL. 238-3, WITH TRUNCATED DOMES.
 23. INSTALL NEW PAINTED CROSSWALK YELLOW.
 24. INSTALL CONCRETE HEADER CURB AS PER DETAILS.

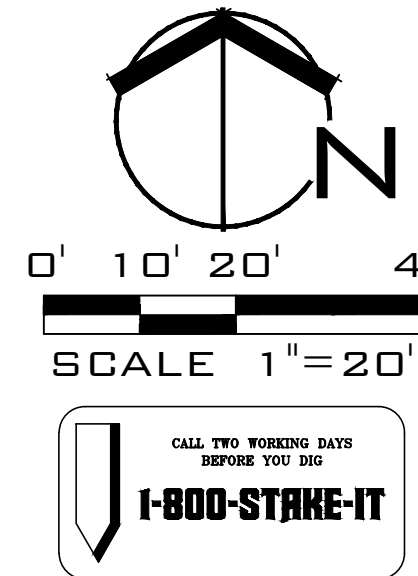

DRAWN BY: SRW
JOB NO: 2138.200
DATE: 09-14-2023
REVISIONS

CIVIL PAVING PLAN

PV1.1
50% CONSTRUCTION DOCUMENTS

CONSULTANTS

CIVIL
Kimley-Horn
7740 N 16th St, Suite 300
Phoenix, AZ 85020
Phone: 602.944.5500

STRUCTURAL
Pargolin Structural
1440 E Missouri Ave, Suite C-195
Phoenix, AZ 85014
Phone: 602.888.0336

MECH/PLUMBING/ELEC
Energy Systems Design, Inc
7135 E Camelback Rd, Suite 275
Scottsdale, AZ 85251
Phone: 480.481.4900

SW VERDE OLVA - WESD

0007 SUS BUS

7502 N. 39th Avenue
Phoenix, AZ 85051

bws ARCHITECTS

BURNS WALD-HOPKINS SHAMBACH ARCHITECTS

261 North Court Avenue
Tucson, Arizona 85701
520.793.2705
www.bwsarchitects.com