

February 02, 2021

Attn: Benny Bucholz
Higley USD
2935 S Recker Rd
Gilbert, AZ 85295

Project Name

Higley HS - Front Parking Lot -
AW vs NAW
4068 E Pecos Rd
Gilbert, AZ 85295

**THIS BID IS PREPARED IN ACCORDANCE TO UNIT PRICING ON COOPERATIVE
CONTRACT NUMBER 17-16P-04 ISSUED BY 1 GOVERNMENT PROCUREMENT
ALLIANCE (1GPA)**

Asphalt Milling & Paving (Adjacent Ways)

1. The area under consideration for new asphalt surface comprises approx. 36,032 square feet.
2. Provide necessary hydrant water meter for construction use.
3. Mill and haul off existing asphalt to a depth of 3 inches.
4. Fine grade and compact existing base material as necessary.
5. Tack all edges of existing curb and/or asphalt as necessary.
6. Place and compact new 1/2" mix asphalt to a finished depth of 3 inches using a self propelled paving machine and vibratory steel drum rollers. All work will be completed in 1 trip(s).
7. Adjust 10 water valves & 2 manholes flush with new asphalt elevations in concrete collars per Maricopa Association of Governments (MAG) specifications.
8. Re-stripe to match existing layout including red curb.

Total Price for this item: \$98,192.37

Asphalt Removal And Replacement (Non-Adjacent Ways)

1. Make necessary sawcuts.
2. Remove approximately 1,018 square feet of deteriorated asphalt in 20 locations.
3. Grade and compact existing base material as necessary.
4. Place and compact new 1/2" mix asphalt to a finished depth of 3 inches.
5. All repairs will be shaped symmetrically where possible.

Total Price for this item: \$6,360.50

Proposal: Higley HS - Front Parking Lot - AW vs NAW



Type II Slurry Seal (Non-Adjacent Ways)

1. Secure area with "A" frame barricades and/or traffic cones and caution tape as needed.
2. Clean existing pavement totalling 3,365 square yards.
3. Apply hot Maxwell Elastoflex to cracks wider than 1/4" that can accept filler.
4. Apply a MAG Type II Slurry Seal at the rate of 18-20 pounds per square yard on approximately 3,365 square yards of existing pavement surface.
5. Re-stripe to match existing layout including stencils.
6. Work will be completed in 1 trip.

Total Price for this item: \$14,936.55

Clean, Crack Fill And Seal Coat With SealMaster PMM (Non-Adjacent Ways)


1. Area to be sealed is approximately **30,285 square feet**.
2. Secure area with "A" frame barricades and/or traffic cones and caution tape as needed.
3. Clean existing pavement totaling **30,285 square feet** with a ride on sweeper and/or high pressured blowers.
4. Apply hot Maxwell Elastoflex to cracks wider than 1/4" that can accept filler.
5. Apply a **2 coat(s) Spray application** of SealMaster PMM asphalt emulsion sealer. Areas around planters and concrete will be hand applied using a squeegee to prevent overspray.
6. Re-stripe to match existing layout including stencils.
7. Work will be completed in **1 trip(s)**.
8. Oil spots will be cleaned as thoroughly as possible and a primer will be applied to the heaviest areas. However, some delamination of sealer may take place in these areas.
9. It is the owners responsibility to have all material, cars, equipment etc. removed from the area where the work will take place.
10. This process will carry a (2) year warranty on materials, labor, and workmanship. Roadrunner Paving & Asphalt Maintenance will repair any areas at our expense that are deemed warranty covered. Normal wear and tear, severe weather, abuse, or acts of God will not be considered under warranty coverage.

Total Price for this item: \$7,677.14

Proposal: Higley HS - Front Parking Lot - AW vs NAW



Image

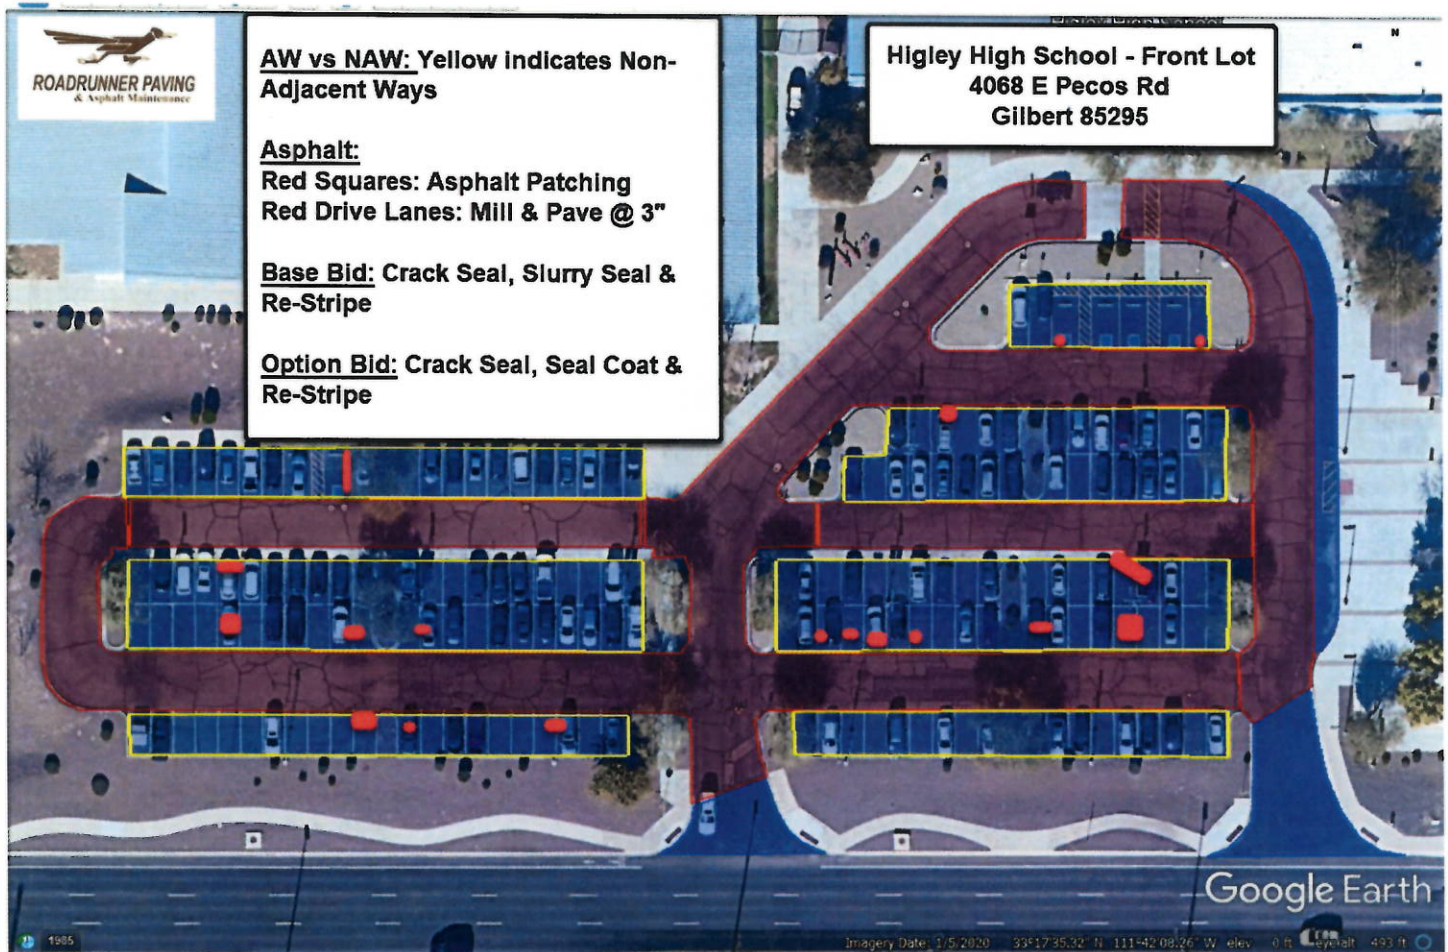

Notes:

Price Breakdown: Higley HS - Front Parking Lot - AW



Please find the following breakdown of all services we have provided in this proposal. This proposal originated on February, 02, 2021. **Job Number:** 5073

Item	Description	Cost
1	Asphalt Milling & Paving (Adjacent Ways)	\$98,192.37
2	Asphalt Removal And Replacement (Non-Adjacent Ways)	\$6,360.50
3	Type II Slurry Seal (Non-Adjacent Ways)	\$14,936.55
Total		\$119,489.42

Optional Services:

Item	Description	Cost
1	Clean, Crack Fill And Seal Coat With SealMaster PMM (Non-Adjacent Ways)	\$7,677.14
Total:		\$7,677.14

Authorization to Proceed & Contract

You are hereby authorized to proceed with the work as identified in this contract. By signing and returning this contract, you are authorized to proceed with the work as stated.

We understand that if any additional work is required different than stated in the this proposal/contract it must be in a new contract or added to this contract.

Please see all attachments for special conditions that may pertain to aspects of this project.

Contract Terms & Conditions

1. Payment is balance due upon completion; any amount over 30 days will be assessed late charges of 2% monthly.
2. Warranty: Two year on materials, labor, and workmanship. Roadrunner Paving & Asphalt Maintenance will repair any areas at our expense that are deemed warranty covered. Normal wear and tear, severe weather, abuse, or acts of God will not be considered under warranty coverage. Reflective cracking on overlays will not be covered.
3. All towing of vehicles to be coordinated by owner. A towing charges of \$60 per vehicle will occur if vehicles are in work area on date selected for work to be performed. All towing to be approved by owner prior to commencement of work.
4. Notification of work dates to residents are not included in this proposal.
5. Crack fill will not be placed in extremely cracked, "alligatored" areas
6. Traffic control will be maintained while Roadrunner employees are on site. Once the employees have left the job, it becomes the responsibility of the customer to maintain traffic control. Portions of the project will be unusable while work is performed and to let material have time to setup / cure.
7. Roadrunner Paving & Asphalt Maintenance maintains adequate insurance and workers compensation policies.
8. This proposal does not include engineering, testing, permits or any other associated fees.
9. We are not responsible for any damage due to unmarked and or shallow utilities. Utility adjustments are not included unless specifically stated on this proposal.
10. There are no guarantees on drainage unless otherwise specifically outlined above.
11. On projects where we are milling or pulverizing the existing pavement, areas that have saturated subgrade or grade issues must be addressed. This may or may not impact the amount listed on this proposal.
12. Fire lane curb that is striped over existing red fire lane curb and flakes due to previous paint flaking will not be covered by warranty. Roadrunner Paving & Asphalt Maintenance can clean the existing curb at an additional cost.
13. Roadrunner Paving & Asphalt Maintenance is not responsible for any utility adjustment fees required by municipality.

Attachments

Please click any of the links below to view and print all documents.

Company Attachments

[Insurance Certificate \(GL/Auto/WC/Umbrella\)](#)

[Maxwell Elastoflex 380](#)

[Roadrunner Paving & Asphalt MaintenanceW9](#)

[Sealmaster PMM RTU](#)

[Southwest Asphalt - Asphalt MSDS](#)

Proposal: Higley HS - Front Parking Lot - AW vs NAW



Payment Terms

We agree to pay the total sum or balance in full 30 days after the completion of work.

I am authorized to approve and sign this project as described in this proposal as well as identified below with our payment terms and options.

Date: 3/24/2021

Benny Bucholz / Pac Dir
Higley USD
2935 S Recker Rd
Gilbert, AZ, 85295
benny.bucholz@husd.org
C: 480-797-9779
O: 480-797-9779

John T. McCormack | Sales
Roadrunner Paving & Asphalt Maintenance, LLC
1959 S Power Rd, Suite 103-419
Mesa, Arizona, 85206
john@roadrunnerpavingaz.com
C: 602-341-9881
P: 480-892-7101
F: 480-892-0772
<http://www.roadrunnerpavingaz.com>

Schedule of Values

			Cost per Unit	District	Other On-Site	Off-Site
	= Cells to be completed - as required	Quantity	(no markup)	Cost	Funding (Adjacent Ways, etc.)	Adjacent Ways
Div 28	SAFETY AND SECURITY					
28 10 00	security system					
28 20 00	surveillance/alarm					
28 31 00	fire alarm system					
	Division 28 total	0.00		\$0.00	\$0.00	\$0.00
Div 31	EARTHWORK					
31 23 00	earthwork/mass excavation					
31 23 00	import/export dirt					
31 31 00	soil treatment - termite					
	Division 31 total	0.00		\$0.00	\$0.00	\$0.00
Div 32	EXTERIOR IMPROVEMENTS					
32 00 00	parking					
32 00 00	unusal site conditions					
32 10 00	asphalt/paving			\$20,361.75	\$96,633.62	
32 13 00	site concrete					
32 13 00	sidewalks					
32 17 00	striping/signage			\$935.30	\$1,558.75	
32 31 13	chainlink fencing					
32 31 19	wrought iron fencing					
32 32 00	retaining walls					
32 80 00	irrigation					
32 90 00	landscaping					
	Division 32 total	119,489.42		\$21,297.05	\$98,192.37	\$0.00
Div 33	UTILITIES					
33 00 00	site utilities					
33 21 00	wells					
33 32 16	lift station					
33 36 00	septic system					
33 40 00	stormwater/drainage					
33 49 23	drywells					
	Division 33 total	0.00		\$0.00	\$0.00	\$0.00
	Subtotal	\$119,489.42		\$21,297.05	\$98,192.37	\$0.00
	A/E Fee		\$0.00			
0.00%	Contractor Fee		\$0.00			
	Project Manager Fee		\$0.00			
	General Conditions		\$0.00			
0.00%	Contractor Contingency		\$0.00			
0.00%	Builders Risk/Liability Insurance		\$0.00			
0.00%	Performance & Payment Bonds		\$0.00			
0.00%	Sales Tax		\$0.00			
	Subtotal	\$0.00		\$0.00	\$0.00	\$0.00
	Grand Guaranteed Maximum Price (GMP)	\$119,489.42				