



VERIFY IN FIELD SOLAR PANEL STRUCTURE COLUMNS AND OVERHANG SOLAR ARRAYS CLEARANCE.

Demolition General Notes

- DO NOT COMMENCE DEMOLITION WORK UNTIL OWNER HAS REMOVED EXISTING FURNISHINGS, EQUIPMENT, AND DEMOUNTABLE OR MOVEABLE DEVICES, ETC. AND HAS PROVIDED THE DEMOLITION CONTRACTOR WRITTEN NOTICE TO PROCEED.
- PROTECT ALL ADJACENT SURFACES FROM DAMAGE NOT INDICATED AS BEING REMOVED. DAMAGED SURFACES SHALL BE REPAIRED, AT NO ADDITIONAL COST, TO THEIR ORIGINAL CONDITION.
- CONTRACTOR SHALL ERECT AND MAINTAIN SAFETY BARRIERS, WARNING DEVICES, ENTRY PORTALS, ETC. AS NOTED IN SPECIFICATIONS TO PROTECT STAFF AND PUBLIC DURING ALL CONSTRUCTION ACTIVITIES.
- SURFACES DAMAGED BY DEMOLITION SHALL BE REPAIRED SUCH THAT THE SURFACES MATCH THE SURROUNDING MATERIAL, TEXTURE, FINISH AND COLOR. THE FINISHED SURFACE SHALL NOT BE DISTINGUISHABLE FROM THE SURROUNDING SURFACE.

Demolition Keynotes

- ① REMOVE (E) CONC. SEAT WALL.
- ② REMOVE (E) SIGN.

Construction General Notes

- PROJECT HAS BEEN DESIGNED TO COMPLY WITH 2018 INTERNATIONAL BUILDING CODE (IBC) AND 2010 ADA STANDARDS FOR ACCESSIBLE DESIGN.
- DASHED LINES THAT INDICATE LIMITS OF WORK ARE APPROXIMATE FOR GENERAL REFERENCE ONLY. ACTUAL LIMITS OF WORK MAY EXTEND BEYOND & OUTSIDE THE GRAPHIC LIMITS SHOWN WITH PERMISSION FROM THE OWNER.
- EXISTING CONDITIONS SHOWN ARE APPROXIMATE. CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS. SOME SITE ELEMENTS MAY NOT BE SHOWN ON THE SITE PLAN INCLUDING SOLAR CANOPY COLUMNS.
- CONDITIONS SHOWN ARE FOR GUIDANCE AND GENERAL INFORMATION ONLY. CONTRACTOR SHALL VISIT THE SITE AND EVALUATE ALL (E) CONDITIONS IN THE FIELD AND PROVIDE FOR ALL COSTS RELATED TO ACCOMPLISHING THE WORK. NOTES SHOWN ON THE CONTRACT DOCUMENTS SHALL BE INCORPORATED INTO THE PROJECT AT ALL APPROPRIATE LOCATIONS, WHETHER OR NOT SPECIFICALLY REFERENCED.
- CONTRACTOR IS SOLELY RESPONSIBLE FOR VERIFYING LOCATION AND INVERT OF ALL EXISTING UTILITY LINES AND PROTECTING SAME DURING ALL PHASES OF CONSTRUCTION. ALL DAMAGED EXISTING UTILITY LINES SHALL BE REPAIRED TO THEIR ORIGINAL CONDITION AT NO COST TO THE OWNER.

Construction Keynotes

- ① CONC. SEAT WALL, SEE DETAIL 1/AS2.1.
- ② STEEL BOLLARD, SEE DETAIL 2/AS2.1.
- ③ REMOVE AND REPLACE (E) STOP SIGN AND POST, SEE DETAIL 3/AS2.1.
- ④ REMOVE AND REPLACE (E) FIRE LANE SIGN AND POST, SEE DETAIL 4/AS2.1.
- ⑤ FIRE LANE SIGN AND POST, SEE DETAIL 4/AS2.1.
- ⑥ 'CAUTION LOW OVERHEAD CLEARANCE' SIGN ON POST, SEE DETAIL 5/AS2.1.
- ⑦ 'CAUTION LOW OVERHEAD CLEARANCE' SIGN MOUNTED ON (E) CANOPY, SEE DETAIL 5/AS2.1.
- ⑧ RE-INSTALL (E) 'ATTENTION STUDENTS, STAFF AND VISITORS' SIGN ON NEW POST, SEE DETAIL 6/AS2.1.
- ⑨ REMOVE AND REPLACE (E) 'NO TRESPASSING' SIGN AND POST, SEE DETAIL 7/AS2.1.
- ⑩ REMOVE AND REPLACE (E) 'PERMIT PARKING ONLY' SIGN, SEE DETAIL 8/AS2.1.
- ⑪ REMOVE AND REPLACE (E) 'STUDENT DROP-OFF/PICK-UP' SIGN AND POST, SEE DETAIL 9/AS2.1.
- ⑫ 'STUDENT DROP-OFF/PICK-UP' SIGN AND POST, SEE DETAIL 9/AS2.1.
- ⑬ ID CHECK SIGN AND POST, SEE DETAIL 10/AS2.1.
- ⑭ REMOVE AND REPLACE (E) 'VISITOR & STAFF PARKING' SIGN, SEE DETAIL 11/AS2.1.
- ⑮ REMOVE AND REPLACE (E) 'STAFF PARKING' SIGN, SEE DETAIL 12/AS2.1.
- ⑯ REMOVE AND REPLACE (E) 'STUDENT PARKING' SIGN AT NEXT ROW NORTH, SEE DETAIL 13/AS2.1.
- ⑰ REMOVE AND REPLACE (E) RIGHT TURN ONLY SIGN AND POST, SEE DETAIL 14/AS2.1.
- ⑱ REMOVE AND REPLACE (E) LEFT TURN ONLY SIGN AND POST, SEE DETAIL 15/AS2.1.
- ⑲ REMOVE AND REPLACE (E) 'DO NOT ENTER' SIGN, SEE DETAIL 16/AS2.1.
- ⑳ (E) SIGN TO REMAIN.
- ㉑ 2" HEAVY DUTY PLASTIC CHAIN - YELLOW.
- ㉒ REINSTALL ASPHALT CURB RAMP TO MATCH (E).
- ㉓ PAINT CURB RED. "NO PARKING FIRE LANE" PAINTED WHITE ON CURB EVERY 100' O.C.


Legend

- ON-SITE ADJACENT WAYS
- DISTRICT COST

Breckenridge
 Architects
 Planners

1735 e ft. lowell rd. #12
 tucson arizona 85719
 520.882.9944

Amphitheater Public Schools
 Canyon del Oro High School
 East Parking Lot Improvements

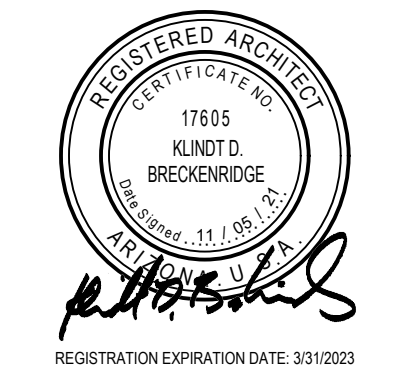

PROJECT NO:
17.14.66

DATE:
OCTOBER 2021

REVISION	SCHEDULE	DATE	DESCRIPTION	ISSUED TO

DRAWN BY: SC
 CHECKED BY: KDB

THIS DRAWING IS NOT TO BE USED FOR CONSTRUCTION PURPOSES UNTIL SEALED AND SIGNED BY ARCHITECTS OF BRECKENRIDGE GROUP P.C., ARCHITECTS/PLANNERS, OR DESIGNATED CONSULTANTS.

Architectural
 Site Plan

AS1.1

CHECKED BY:
DRAWN BY: