





BIM 360/30-21129-00 Litchfield White Tanks Learning Center/30-21129-00_AR_LW/LTC_2020.rvt
10/5/2021 2:06:45 PM

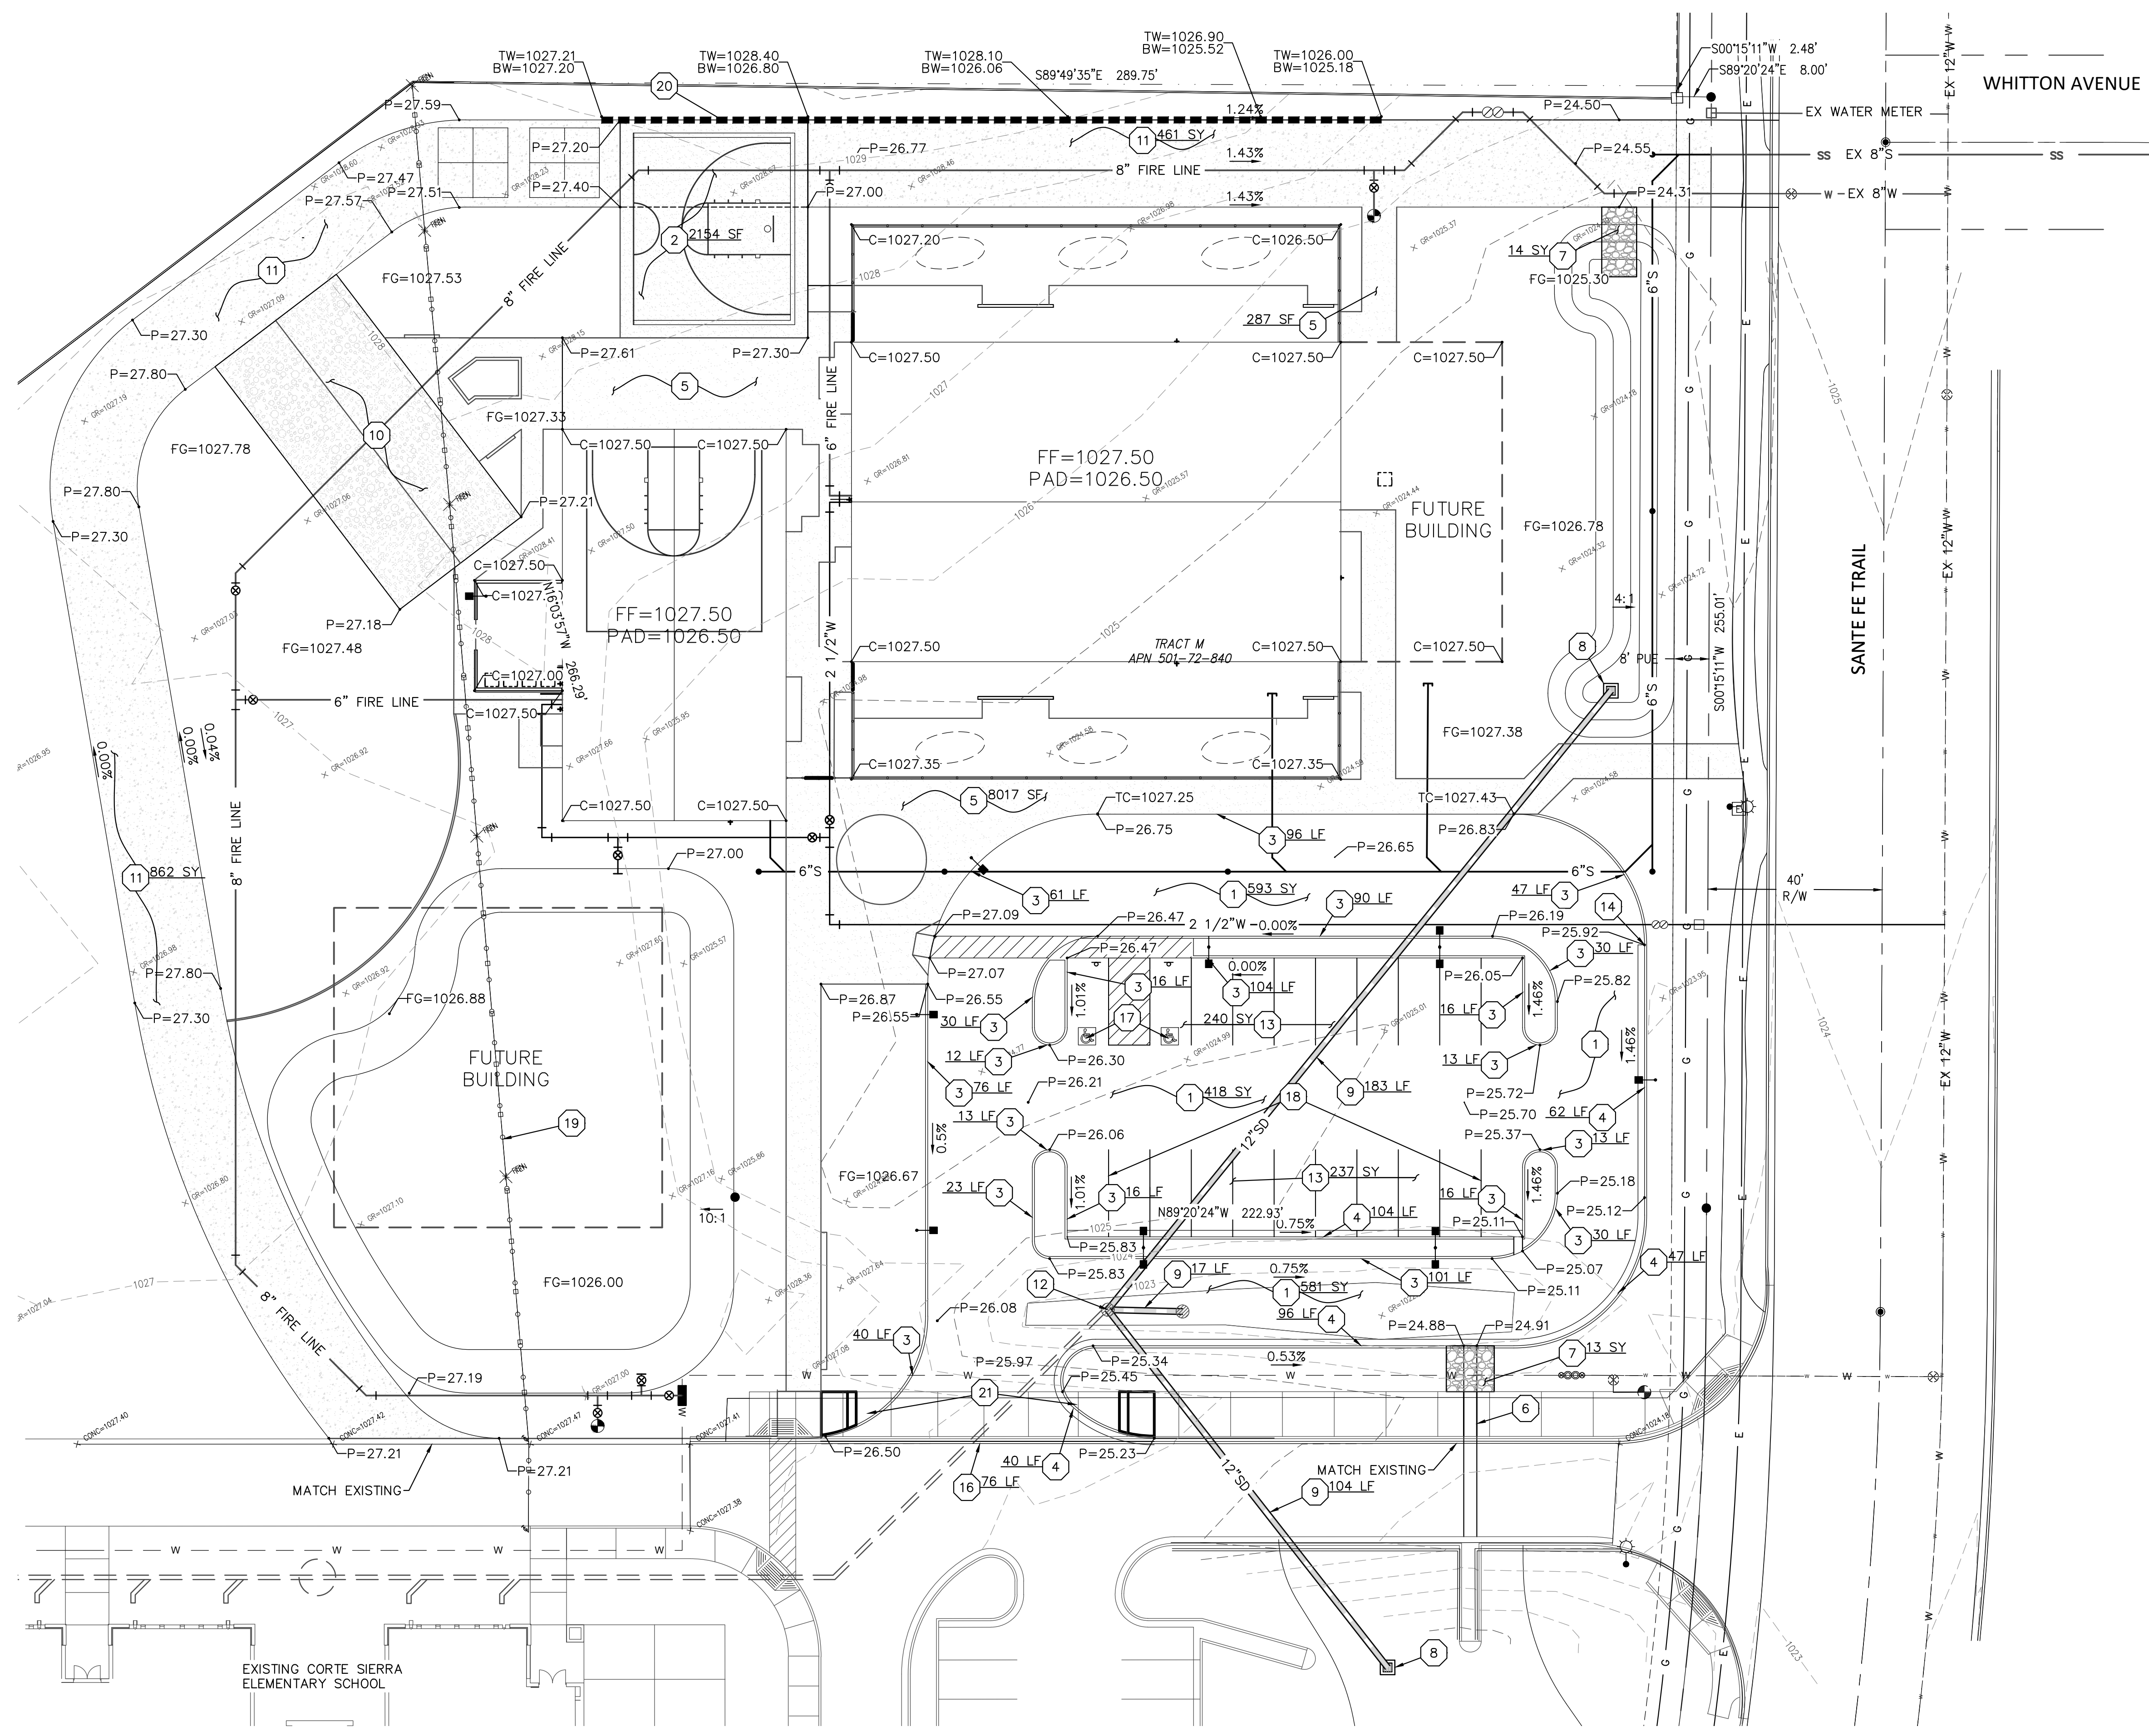

- PAVING CONSTRUCTION NOTES**
- 1 INSTALL ASPHALTIC PAVEMENT PER SECTION #1 ON 1592 SY
SHT CD1.2
 - 2 CONSTRUCT CONCRETE BASKETBALL COURT 2154 SF
SEE ARCHITECTURAL PLANS FOR DETAILS
 - 3 INSTALL 6" SINGLE CURB PER MAG STD DTL 222, 843 LF
TYPE A
 - 4 INSTALL 6" VERTICAL CURB & GUTTER PER MAG STD 349 LF
DTL 220-1, TYPE A
 - 5 INSTALL 4-INCH CONCRETE SIDEWALK 8363 SF
 - 6 INSTALL CONCRETE SCUPPER PER MAG STD 206-3 1 EA
SHEET CD1.2
 - 7 INSTALL GROUTED RIP-RAP EROSION CONTROL D50=6", 27 SY
12" THICK. COLOR AND TYPE PER LANDSCAPE PLANS
 - 8 INSTALL CATCH BASIN TYPE F PER MAG STD DTL 535 2 EA
 - 9 INSTALL 12" PVC 304 LF
 - 10 REFER TO ARCHITECTURAL PLANS FOR PLAYGROUND 1
INFORMATION
 - 11 INSTALL CONCRETE PAVEMENT PER SECTION #3 1323 SF
ON SHEET CD1.2
 - 12 RAISE EXISTING DRYWELL AND INTERCEPTOR CHAMBER 1
TO PROPOSED GRADE. REMOVE EXISTING CONE, INSERT
RISER AND REPLACE CONE
 - 13 INSTALL ASPHALTIC PAVEMENT PER SECTION #2 ON 477 SY
SHEET CD1.2
 - 14 INSTALL CURB TRANSITION PER MAD STD DTL 221 1 EA
 - 16 REMOVE CURB, GUTTER, AND SIDEWALK 76 LF
 - 17 ADA SIGN
 - 18 PAINT STRIPES
 - 19 REMOVE EXISTING FENCE
 - 20 RETAINING WALL/ SEAT WALL. SEE LANDSCAPE AND 1 EA
STRUCTURAL PLANFOR DETAILS
 - 21 REMOVE AND REPLACE WITH CONCRETE PER TEMPE
STANDARD DETAIL T-348, SEE DETAIL INCLUDED ON
SHEET CD1.2

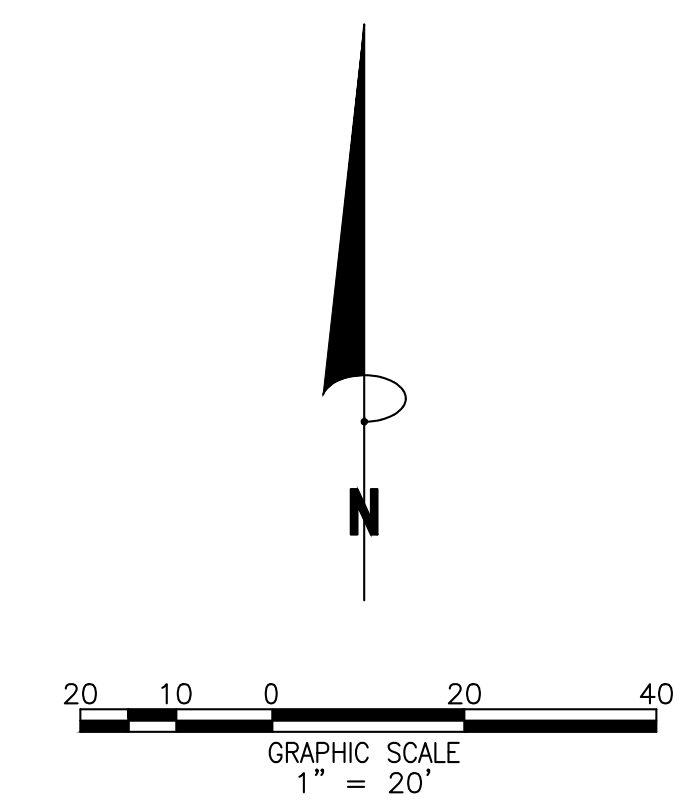

Call at least two full working days
before you begin excavation.
ARIZONA 811
Arizona Blue State, Inc.
Dial 8-1-1 or 1-800-STAKE-IT (782-5348)
In Maricopa County: (602) 263-1100

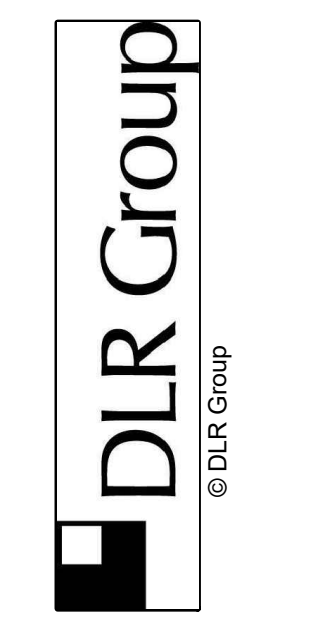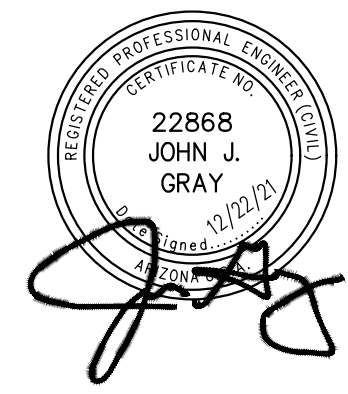

WHITE TANK LEARNING CENTER
LEARNING CENTER ALTERNATIVE SCHOOL
3300 N SANTA FE TRAIL
AVONDALE, AZ 85392

CONSTRUCTION DOCUMENTS
12/22/21

30-21129-00
GRADING PLAN

CD2.0