
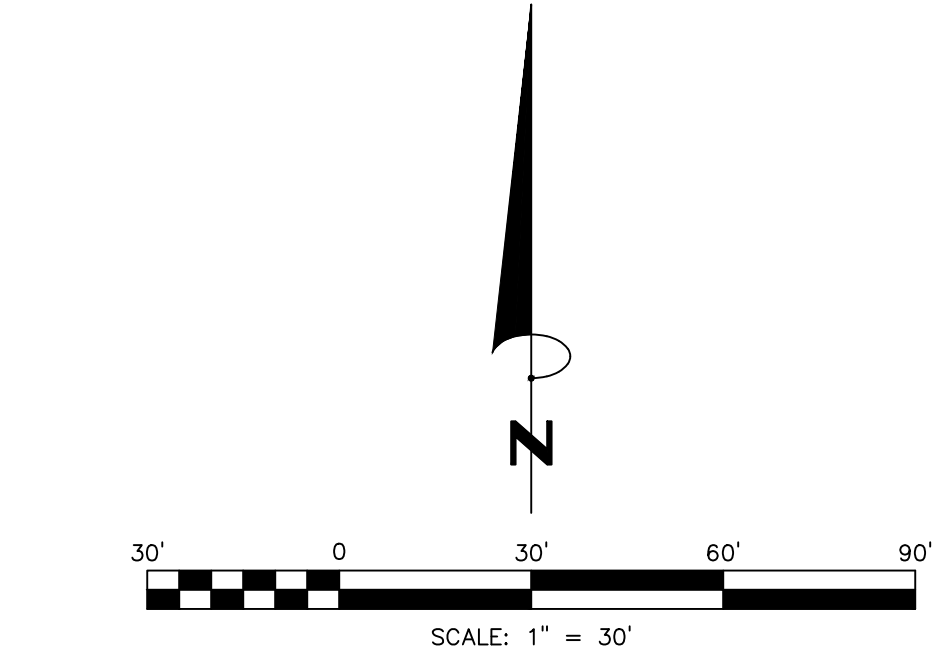


BN 360/30-19162-00_SomertonES08-19162-00_Air_SomertonES_2019.rvt
10/6/2020 11:23:24 AM

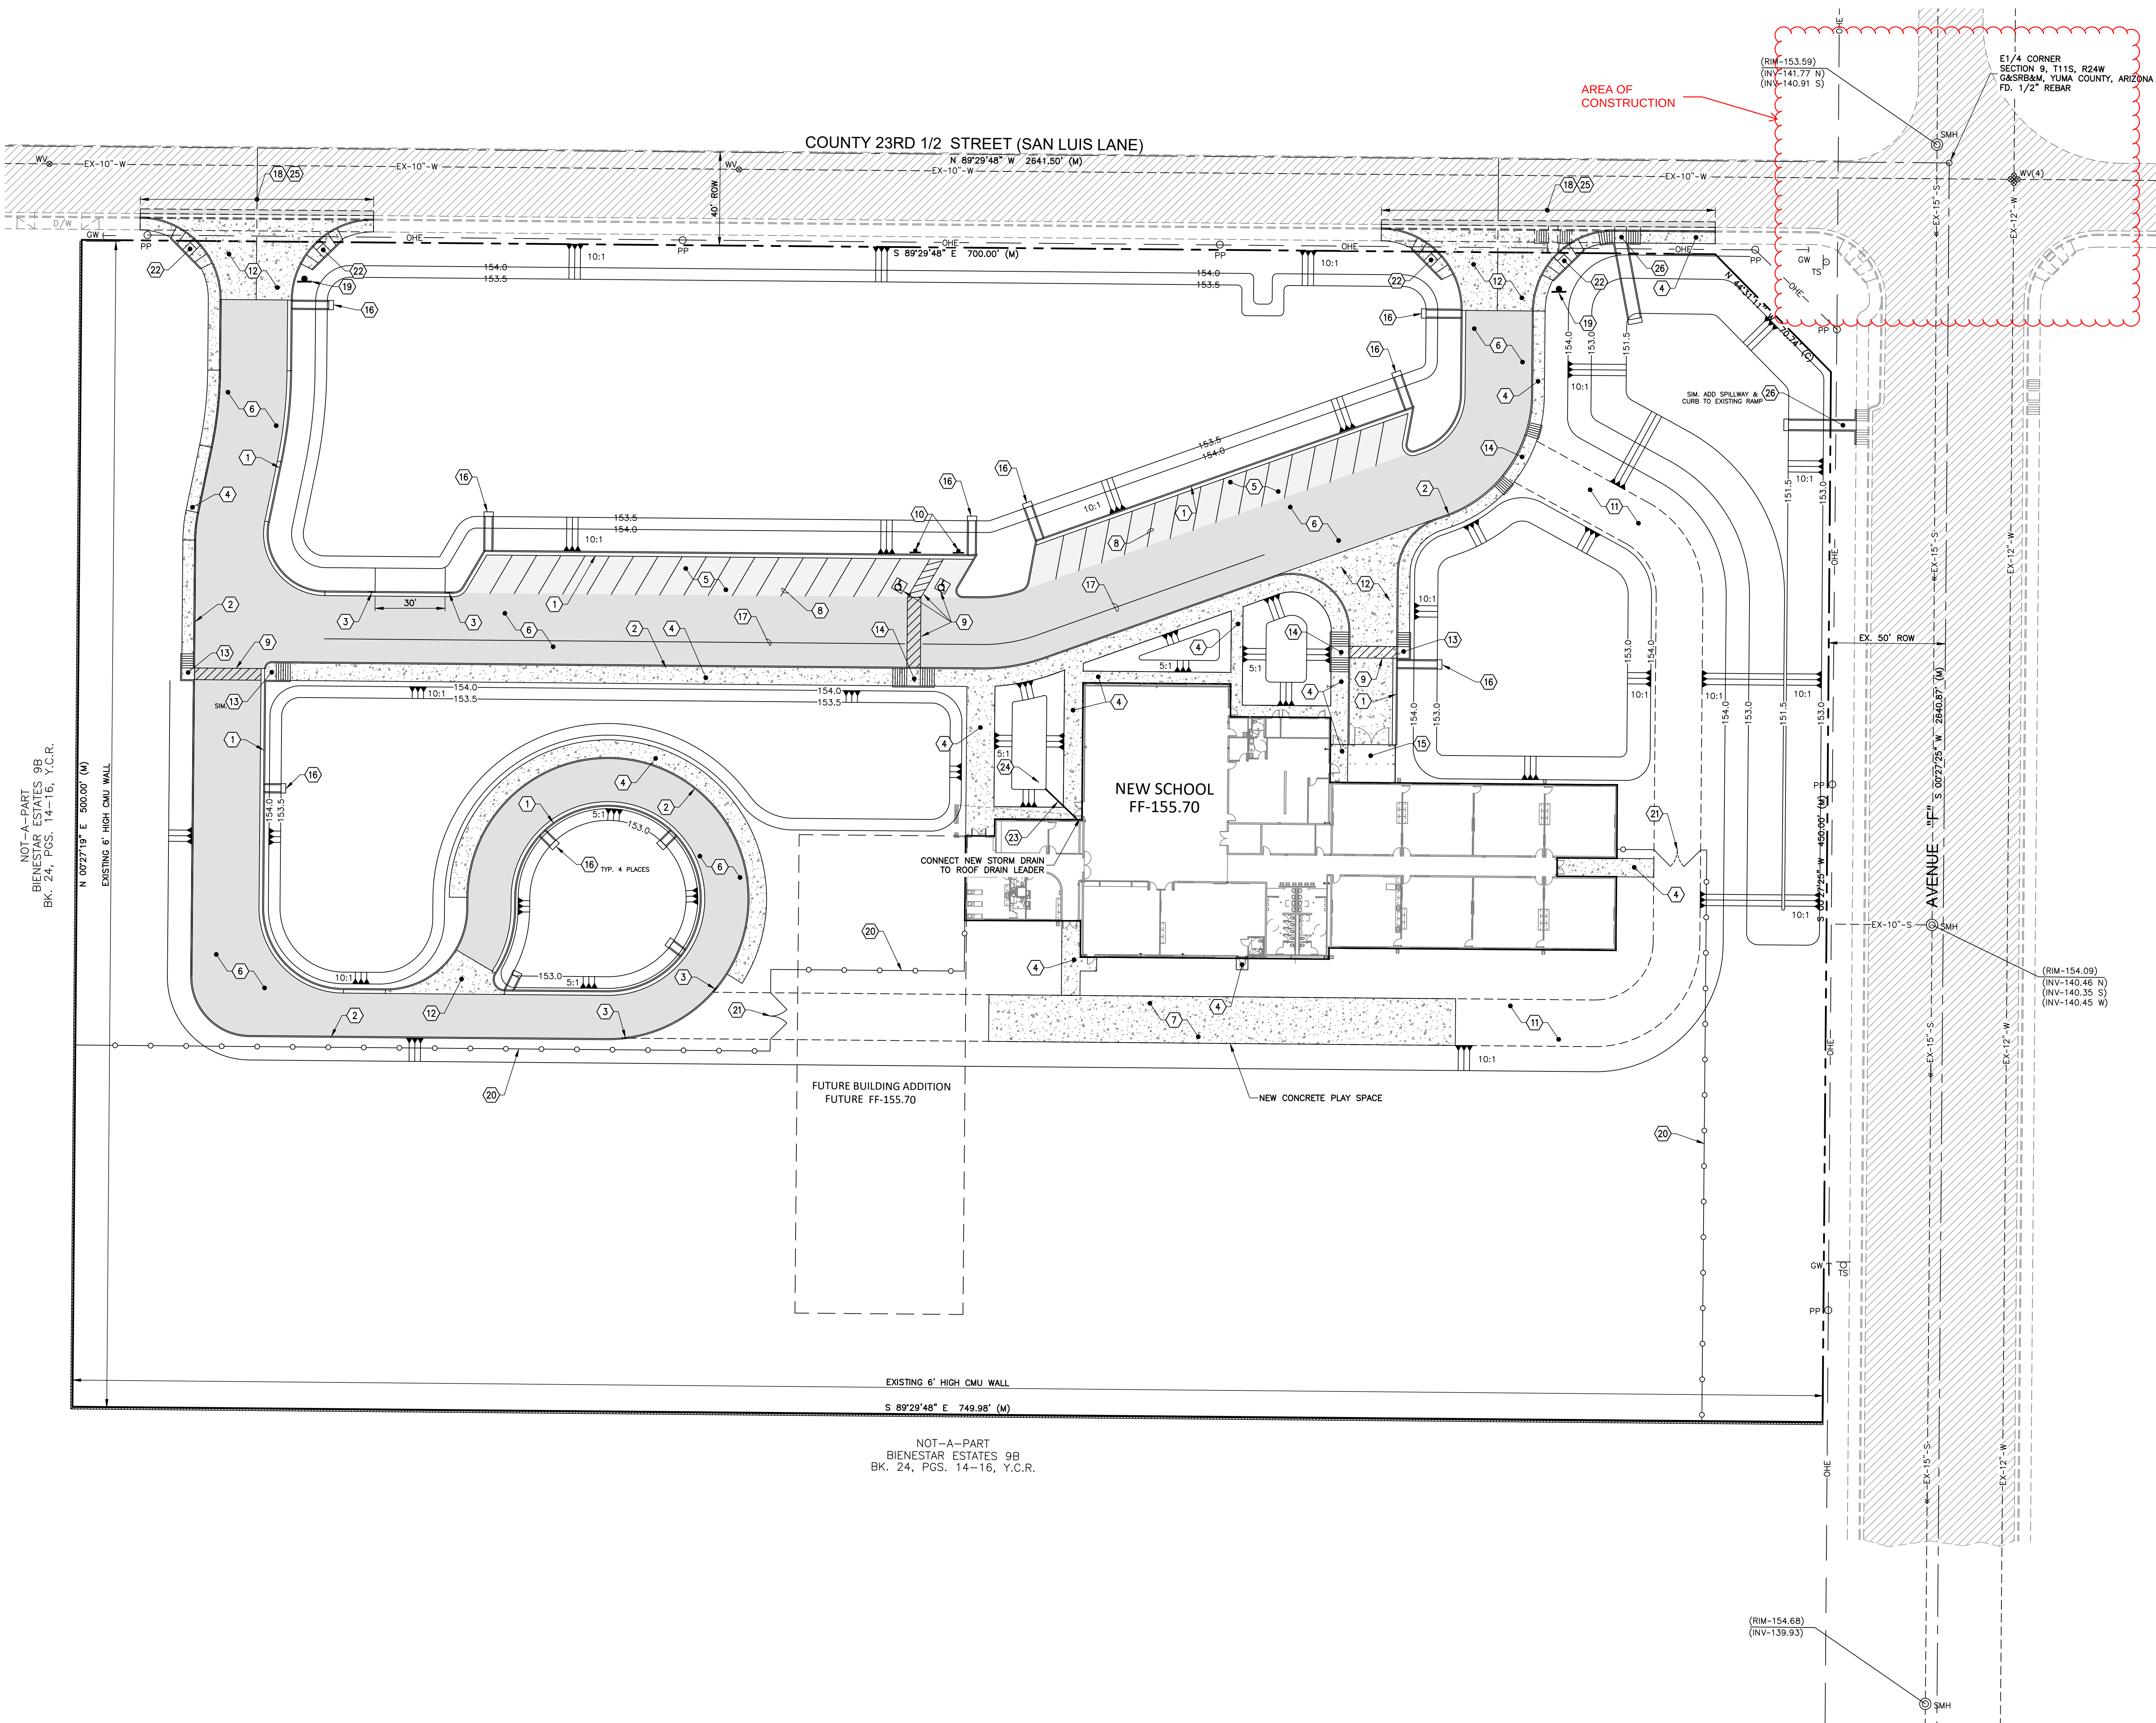

- NOTES**
- ALL MATERIALS AND CONSTRUCTION HEREON SHALL CONFORM TO YUMA COUNTY STANDARDS SPECIFICATIONS & CONSTRUCTION STANDARDS UNLESS OTHERWISE SHOWN ON THESE PLANS.
 - ALL YUMA COUNTY REQUIRED COMPACTION AND LABORATORY TEST SHALL BE FURNISHED BY THE CONTRACTOR TO THE OWNER PRIOR TO THE ACCEPTANCE OF THE PROJECT.
 - CONTRACTOR TO MAINTAIN DUST ABATEMENT AT ALL TIMES DURING CONSTRUCTION.
 - REFER TO THE SITE DIMENSION PLAN FOR LOCATION OF ALL NEW CONSTRUCTION.
 - REFER TO STRUCTURAL PLANS FOR BUILDING SLAB SECTIONS, FOOTINGS, AND FOUNDATION PLANS.
 - ALL ENGINEERED BACKFILL TO BE COMPACTED TO 95% OF MAXIMUM DENSITY AT OPTIMUM MOISTURE.
 - UNDERGROUND UTILITIES SHOWN HEREON ARE ONLY APPROXIMATE. CONTRACTOR SHALL VERIFY LOCATION, DEPTH AND ROUTING OF ALL UTILITIES BEFORE CONSTRUCTION.
 - ALL EXISTING MONUMENTATION SHALL BE REFERENCED PRIOR TO CONSTRUCTION AND REPLACED AFTER ALL WORK IS COMPLETED BY THE CONTRACTOR. (IF DISTURBED)
 - PAVING CONTRACTOR TO PROVIDE ALL BACKFILLED REQUIRED BEHIND ALL NEW IMPROVEMENTS IN ACCORDANCE WITH THE TYPICAL DETAILS AND SLOPE LINES SHOWN HEREON.
 - PAVING CONTRACTOR TO COORDINATE WITH IRRIGATION AND UTILITY CONTRACTORS TO INSURE INSTALLATION OF IRRIGATION AND ELECTRICAL CONDUITS AND ALL UNDERGROUND UTILITIES PRIOR TO PAVING.
 - ALL DIMENSIONS ARE MEASURED FROM THE FACE OF CURB, UNLESS OTHERWISE NOTED.
 - REFER TO THE GEOTECHNICAL SOILS INVESTIGATION FOR PREPARATION OF BUILDING PAD & PARKING LOT AREA.
 - CONTRACTOR TO OBTAIN ENCROACHMENT PERMIT FOR ALL WORK WITHIN CITY OR COUNTY RIGHT-OF-WAY.
 - CONTRACTOR SHALL MAINTAIN ACCESS AT ALL TIMES.

PAVING SCHEDULE OF WORK		
1	NEW VERTICAL CURB AND GUTTER	- SEE DETAIL A/C2.3
2	NEW VERTICAL CURB	- SEE DETAIL B/C2.3
3	NEW 3' CURB TERMINATION	- SEE DETAIL B/C2.3
4	NEW 4" THICK CONCRETE SIDEWALK	- SEE DETAIL C/C2.3
5	NEW ASPHALTIC CONCRETE PAVEMENT (AC) LIGHT DUTY 2-1/2" ASPHALTIC CONCRETE OVER 6" ABC	- SEE DETAIL D/C2.3
6	NEW ASPHALTIC CONCRETE PAVEMENT (AC) HEAVY DUTY 4" ASPHALTIC CONCRETE OVER 8" ABC	- SEE DETAIL E/C2.3
7	NEW REINFORCED CONCRETE	- SEE DETAIL F/C2.3
8	NEW 4" WHITE PAINT STRIPING	- SEE DETAIL G/C2.3
9	NEW PAVEMENT MARKING	- SEE DETAIL H/C2.3
10	NEW "HANDICAP PARKING ONLY" SIGN	- SEE DETAIL I/C2.3
11	NEW 20' WIDE ABC EMERGENCY ACCESS ROAD	- SEE DETAIL J/C2.3
12	NEW DRIVEWAY ENTRANCE WITH CURB RETURNS	- SEE DETAIL K/C2.3
13	NEW SINGLE SIDE SIDEWALK RAMP	- SEE DETAIL L/C2.3
14	NEW SIDEWALK RAMP	- SEE DETAIL M/C2.3
15	NEW ENCLOSURE WITH GATES	- SEE DETAIL N/C2.3
16	NEW CONCRETE SPILLWAY WITH DEPRESSED CURB AND ROCK RIP-RAP (3'-6")	- SEE DETAIL O/C2.3
17	8" SOLID WHITE THERMOPLASTIC STRIPE	- SEE DETAIL P/C2.3
18	SAW CUT 2' OF EXISTING AC PAVEMENT	- SEE DETAIL Q/C2.3
19	NEW R1-1 "STOP" SIGN ON NEW CHANNEL POST	- SEE DETAIL R/C2.3
20	NEW 6" HIGH CHAIN LINK FENCE	- SEE DETAIL S/C2.3
21	NEW 10' WIDE GATES	- SEE DETAIL T/C2.3
22	NEW SIDEWALK RAMP @ DRIVEWAY	- SEE DETAIL U/C2.3
23	NEW 8" SDR 35 PVC STORM DRAIN PIPE	- SEE DETAIL V/C2.3
24	NEW CONCRETE CUTOFF WALL	- SEE DETAIL W/C2.3
25	SAWCUT, REMOVE AND DISPOSE OF EXISTING CONCRETE SIDEWALK, CURB, GUTTER, AND SPILLWAY	- SEE DETAIL X/C2.3
26	NEW SIDEWALK RAMP WITH SPILLWAY	- SEE DETAIL Y/C2.3

UTILITY WARNING

THE UNDERGROUND UTILITIES SHOWN HAVE BEEN LOCATED FROM THE FIELD SURVEY INFORMATION AND EXISTING DRAWINGS. THE SURVEYOR MAKES NO GUARANTEE THAT THE UNDERGROUND UTILITIES SHOWN COMPRISE ALL SUCH UTILITIES IN THE AREA, EITHER IN SERVICE OR ABANDONED. THE SURVEYOR FURTHER DOES NOT WARRANT THAT THE UNDERGROUND UTILITIES SHOWN ARE IN THE EXACT LOCATION INDICATED ALTHOUGH HE DOES CERTIFY THAT THEY ARE LOCATED AS ACCURATELY AS POSSIBLE FROM INFORMATION AVAILABLE. THE SURVEYOR HAS NOT PHYSICALLY LOCATED THE UNDERGROUND UTILITIES.