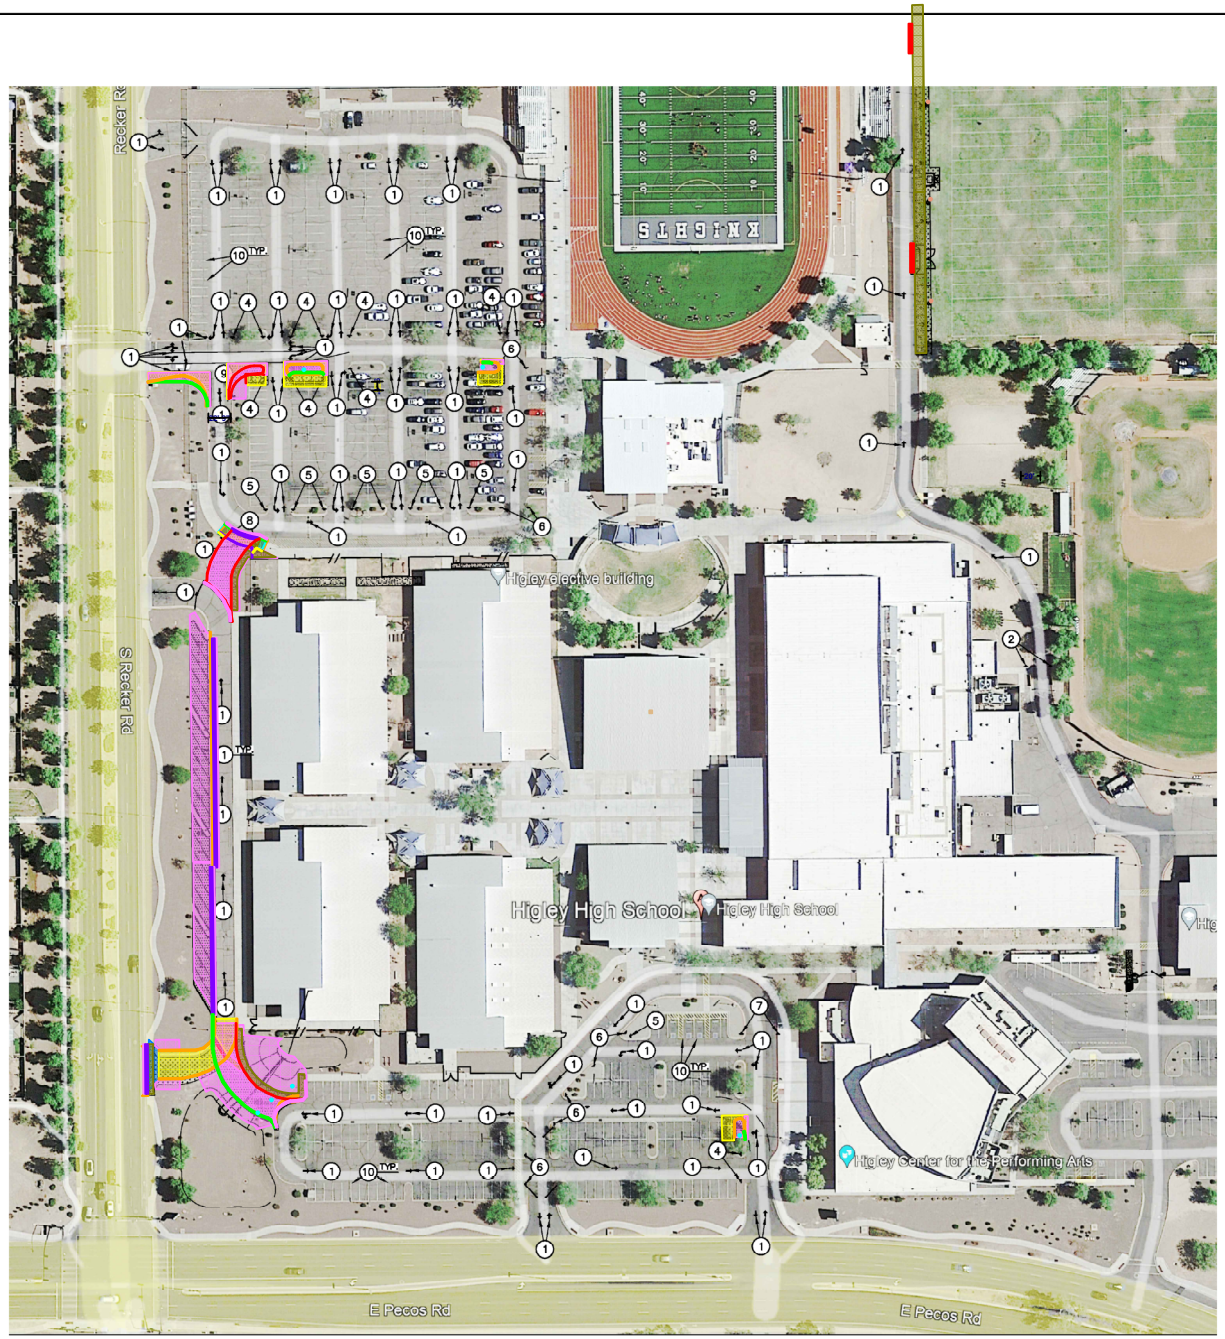

33 - DEMO CURB & GUTTER - 952 LF
34 - DEMO ASPHALT - 5,076 SF
35 - DEMO DG - 18,053 SF
36 - DEMO VERTICAL CURB - 139 LF
37 - DEMO TREE - 6 EA
38 - DEMO SIDEWALK - 732 SF
39 - ADJWAYS - PAVE, R&R - 135 SY
40 - DEMO WROUGHT IRON FENCE, 6' - 48 LF
43 - DEMO DRIVE ENTRANCE - 426 SF
44 - DEMO VALLEY GUTTER - 109 SF
53 - ADJWAYS - PAVE, 3" AC/6" ABC - 717 SY
54 - ADJWAYS - CURB & GUTTER - 295 LF
55 - ADJWAYS - VERTICAL CURB - 327 LF
56 - VERTICAL CURB - 21 LF
59 - ADJWAYS - PAVE, R&R, 2" AC/6" ABC - 27 SY
65 - HANDICAP RAMP - 207 SF
66 - ADJWAYS - VALLEY GUTTER - 465 LF
68 - ADJWAYS - SIDEWALK, STD GREY - 5,569 SF
100 - MISCELLANEOUS STRIPING & SIGNAGE - 1 EA
102 - LIGHT POLE BASE - 3 EA

HESS – ROUNTREE, INC.
CONSULTING ENGINEERS & LAND SURVEYORS
9831 SOUTH 51ST STREET, SUITE C110
PHOENIX, ARIZONA 85044 (480)496-0244

	DRN.	CKD.	JOB NO.
O	JCW	DRO	2205-13

STRIPING NOTES:

PARKING LOT TO THE ALIGNMENTS INDICATED ECTIONAL ARROWS, HANDICAP PARKING SYMBOLS,

" SIGN (M.U.T.C.D. R6-2, WITH POST AND BASE PER STANDARD DETAIL NO. GIL-227).

ROP-OFF" DIRECTIONAL SIGN ON WHITE REFLECTIVE BLACK LETTERING. LETTERING SHALL BE A MINIMUM A BLACK DIRECTIONAL ARROW TO THE WEST (LEFT

RN ONLY SIGN (M.U.T.C.D. R3-5R, WITH POST AND F GILBERT STANDARD DETAIL NO. GIL-227).

N ONLY SIGN (M.U.T.C.D. R3-5L, WITH POST AND F GILBERT STANDARD DETAIL NO. GIL-227).

NTER" SIGN (M.U.T.C.D. R5-1, WITH POST AND F GILBERT STANDARD DETAIL NO. GIL-227).

NT DROP-OFF OR PICK-UP – BUSES ONLY" SIGN SE PER TOWN OF GILBERT STANDARD DETAIL NO. GIL-227).

8. INSTALL "RIGHT TURN ONLY" SIGN (M.U.T.C.D. R3-5R, WITH POST AND BASE PER TOWN OF GILBERT STANDARD DETAIL NO. GIL-227). INSTALL "DO NOT ENTER" SIGN (M.U.T.C.D. R5-1) ON THE BACK OF THE POST.

9. INSTALL SALVAGED FIRE LANE SIGN. POST AND BASE PER TOWN OF GILBERT STANDARD DETAIL NO. GIL-227).

10. RESTRIPE PARKING STALLS AND DROP OFF AREAS TO MATCH EXISTING STRIPING. STRIPING SHALL INCLUDE HANDICAP SYMBOLS, NUMBER, STENCILS, ETC. WHICH ARE ON THE EXISTING PAVEMENT.

NOTE:
THE STRIPING AND SIGNAGE LOCATIONS ON THIS PLAN ARE FOR VISUAL INFORMATION ONLY. THE SHOWN STRIPING LOCATIONS ARE NOT TO THE EXACT MEASUREMENTS AND HAVE BEEN ADJUSTED TO FIT THE SHOWN GOOGLE EARTH AERIAL.

0 15 30 60 120
SCALE: 1"=60'

Call at least two full working days before you begin excavation
ARIZONA 811
Active Line Size, Inc.
(for 8-1-1 or 1-800-STAKE,all (782-5348)
In Maricopa County (602) 263-1100

SIGNAGE AND STRIPING PLAN

HIGLEY UNIFIED SCHOOL DISTRICT NO. 60

SIGNAGE AND STRIPING PLANS FOR HIGLEY HIGH SCHOOL

DRAWING STATUS	SHEET	OF	
100% CD SET	2	2	C-2
DATE: 01/10/23			

2205.30SP2.DWG